



Maruzen

Frozen noodle boiler •
Fresh noodle boiler

Best use for cooking
the frozen noodle
by **wonderful boiling power!**



General commercial kitchen Appliances & Equipment



MARUZEN Co., Ltd.

February 2023 edition

Marvelous boiling power which

It's a knack to boil frozen noodle from



Powerful!

Quick rise time & Continuous cooking available

Boiling power is outstanding by Special-circulated heating method which is from MARUZEN original hole heat pipe. The temperature of hot water does not go down which make cooking finished quickly, even if the frozen noodle is put into tank continuously.

Speedy!


Loosen noodles quickly with big & small bubbles

The big & small bubbles come out from the difference sizes of holes made on the boiling assist plate efficiently and they make noodle move around in the tank. Therefore noodle can be loosened quickly.

Economical!

Marvelous heat efficiency 65% !

The hole heat pipes equipped at up and down 2 deck in tank enable the strong boiling power and heat efficiency 65%. And "Hot water supply device utilizing exhaust heat" equipped. So, scum and slime are removed by overflow without temperature drop in tank.



● Boiling assist plate in tank

The original hole heat pipe equipped!


The energy is absorbed efficiently without any waste by <Special-circulated heating method>.



Capacity
192
meals / h
(Frozen Udon noodle)

MRF-046C


List Price : ¥446,000
(tax-excluded)

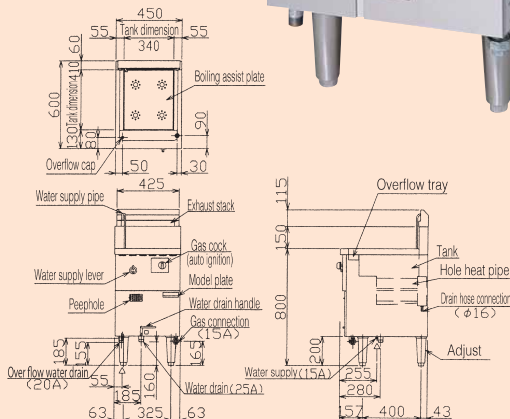

Capacity
288
meals / h
(Frozen Udon noodle)

MRF-066C

List Price : ¥515,000
(tax-excluded)

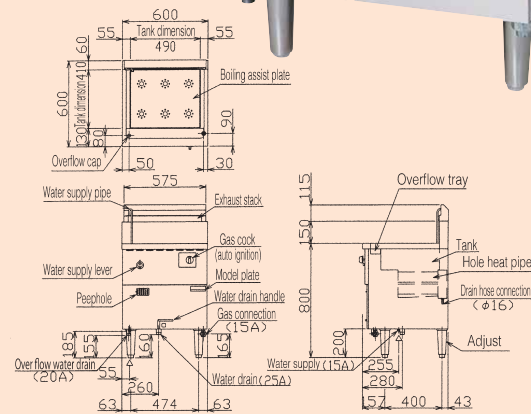

Capacity is different depending on the type and condition of noodle, boiling time, and so on.

ensures maximum deliciousness of the origin of noodle.

a thaw quickly by a short time!



Without any waste! Half-opened flame keeps hot water temp with no waste

Gas cock with "half-opened position" can switch strong flame / weak flame. The half-opened position can be used during idle time and the full-opened position can be used during busy time. The energy-saving and ease of use were considered. (The hot water temperature is kept between approx. 95-100°C at a half-open position.)



● Gas cock with "half-opened position"

Easy-to-use! Suitable position without crouching down

A gas cock and water supply cock are located at the upper part of front body and the overflows are equipped at the front as well, which make your operation easier.

Toughness! Best quality for hard use

The rib reinforcement is prepared on all sides for the boiling tank made of SUS304 which is strong against rust and high durability.




● Inside of tank

■ Option
Hot water won't be spatter by "Side Guard" and safe
List Price : ¥5,000 (tax-excluded)




(Left and right 2 guards in a pair)

This picture shows MRF-066C equipped with side guard.



Capacity
480
meals / h
(Frozen Udon noodle)

MRF-106C (2 tank type)
List Price : ¥847,000 (tax-excluded)

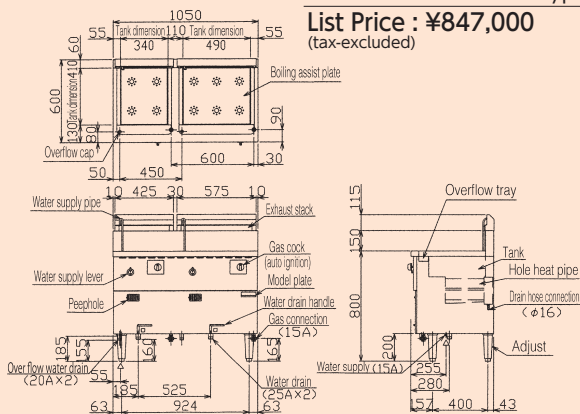

■ Specification table

Model	External dimension (mm)				Tank quantity	Basket quantity	Tank water amount (ℓ)	Gas consumption		Gas connection	Water supply	Water drain	Weight (kg)
	Width	Depth	Height	Back				Town gas	LP gas				
MRF-046C	450	600	800	150	1	4	33	14.5kW (12,500kcal/h)	14.5kW (1.04kg/h)	15A	15A×1	25A·20A	55
MRF-066C	600	600	800	150	1	6	46	23.3kW (20,000kcal/h)	23.3kW (1.67kg/h)	15A	15A×1	25A·20A	71
MRF-106C	1,050	600	800	150	2	4+6	33+46	37.8kW (32,500kcal/h)	37.8kW (2.71kg/h)	15A×2	15A×1	25A×2 20A×2	116

■ Automatic ignition and pilot safety shut off device equipped



The menu increases by "Fresh noodle boiler"

Fresh noodles are boiled up deliciously. The high function as same as frozen noodle boiler. In addition, the steam shutters which improve the effect of energy-saving equipped!

MRF-046RC

List Price : ¥446,000 (tax-excluded)



MRF-066RC

List Price : ¥515,000 (tax-excluded)



MRF-106RC (2 tank type)

List Price : ¥847,000 (tax-excluded)



Steam shutters

High-heat efficiency & Energy saving!



- Only put baskets into the steam shutters

Option

Hot water won't be spatter by "Side Guard" and safe

List Price : ¥5,000 (tax-excluded)



(Left and right 2 guards in a pair)

- Round baskets and round baskets receiver for Fresh noodle are set in advance. Fresh noodles are boiled up speedily and deliciously. The function as same as frozen noodle boiler.
- The steam shutters which improve the effect of energy-saving equipped. Steam shutters are automatically closed when baskets are not used. It makes the heat efficiency higher and boiling time extremely shorter. Also, it protects you from spatter hot water.
- It can be used widely like Ramen, Udon, Soba and more.

※ Fresh noodle boiler is the same specification as frozen noodle boiler.

! Safety Precautions

- Please receive "instruction manual" when purchasing equipments, and read carefully the "instruction manual" before using it. Please do not use for a purpose not described in "instruction manual" and for prohibited matter. Further, please do not use for purpose other than the intended use. Otherwise misuse will cause accidents such as carbon monoxide poisoning, fire and burn and will be cause of breakdown.
- Please do not use gaseous species and a power source (phase, voltage, frequency) not displayed in the main body. Otherwise, it will cause accident and will be cause of breakdown.
- Please do not disassemble or modify the equipment by all means. Otherwise, it will cause the accident or breakdown.

◆ Precaution for Installation

- Equipment installing/moving work and ancillary facility works for such as gas, electricity, steam and water should be in accordance with Fire Service Act, Fire prevention ordinance and "Standards and Practical Guidelines for installing gas equipment". And please thoroughly read the manual instruction or working instruction and ask your dealer that you purchased or a specialized facility management company to properly install your product onto a safety place.
- In a place where a thermal equipment and an exhaust duct with an exhaust hood are installed, please use non-combustible materials such as concrete, brick and mortar for finishing and grounding (inside part of finishing) of equipment body's surrounding area and the upper surrounding area (backward, lateral, upper, floor face and ceiling)
- Where the finishing and grounding of the equipment body's surrounding area and the upper surrounding area are made by other material than non-combustible material when installing a thermal equipment and the exhaust duct with an exhaust hood, please install the equipment with offset distance specified for each equipment. Otherwise, it will cause a fire. Please carefully read "instruction manual" and "working instruction" for non-combustible material and installation standards.
- Be sure to install a heat-resistant/non-combustible exhaust duct with an exhaust hood upon the thermal equipment. As to equipments for generating oil smoke and steam, please install an exhaust duct with an exhaust hood which includes grease removing device. An exhaust fan of an exhaust duct should be operated while an air supply opening is absolutely necessary to be provided at an equipment-installed place.
- Please be sure so as not to extend an exhaust stack of the equipment using gas. Otherwise, it will lead to insufficient performance of equipment, accidents such as carbon monoxide poisoning, fire and burn, or breakdown.
- As to power source of equipment using electricity, please use a correctly-wired dedicated plug or a breaker separately. Be sure to install an earth for the prevention of electric shock (Third-class installation work)
- Please install not to be directly affected by the wind. Otherwise, it may cause insufficient performance or an accident such as fire by the flow of wind from an air conditioner.

■ CAUTION

- Please carry out adequate ventilation, i.e. by turning an exhaust fan when using the thermal equipment. It must be noted that insufficient ventilation will cause accident such as carbon monoxide poisoning due to incomplete combustion.
- Please do not leave the device when using because it is dangerous. Be sure to extinguish fire, close the gas main and turn off the power switch when you leave out from the equipment and do not use the equipment. Otherwise, it can cause a fire due to abnormal overheating.
- There is a possibility of causing fire if oil debris and dirt are accumulated too much at the equipment body's surrounding area, a gravy tray/waste oil receiver and a water tray. Please keep it clean.
- Please do not touch any part other than an operation unit because the equipment body and the surrounding part become hot during in use and soon after that. And please keep away your hand and face from the exhaust port. Or you may get burned.
- Do not apply water to equipment body and do not wash the whole part with water. Otherwise, it will cause the malfunction of equipment.
- If an emergency happens such as an earthquake, fire and gas leakage, please stop the usage of equipment and turn off the gas main.
- Please do not put any combustibles or flammables such as a spray, gasoline, benzene, etc upon the equipment and the surrounding area. It may cause fire.
- Please sufficiently consult with a specialized physician when a medical electronic device user such as a pacemaker will use an electromagnetic equipment.
- Products listed herein are for commercial purpose. For domestic use, be sure to consult with a dealer that you purchased or a specialized facility management company and properly install the equipment in accordance with prescribed installation standards.

● The visual appearance and specification of products listed on this catalog may partly be altered due to quality improvement without notice.

● The price in this catalogue may not be the latest one.

Costs for delivery, installation and withdrawal of old model are not included in this price.

General commercial kitchen Appliances & Equipment



MARUZEN Co., Ltd.

Listed on the Tokyo Stock Exchange (TSE)

<http://www.maruzen-kitchen.co.jp/>

■ Overseas Division

2-19-18 Negishi, Taito-ku, Tokyo, Japan
Tel: 81-3-5603-5516 Fax: 81-3-5603-5517

■ Taiwan Maruzen Co., Ltd.

FL.12-3, No.202, Sec.2, Yen-ping North Rd., Taipei, Taiwan, R.O.C.
Tel: 886-2-2550-1355 Fax: 886-2-2550-1399

■ Maruzen (Thailand) Co., Ltd.

Room 184/193 Floor29-C3 Forum Tower Rachadaphisek Rd. Huai Khwang, Huai Khwang, Bangkok 10310 Thailand
Tel 66-2-645-4242 Fax 66-2-645-4241

■ contact

For professional use