


Auto-ignition

Low Range < Cool Kitchen Series > MLO Series

By remarkably improvement of thermal efficiency, gas consumption is reduced, which realize energy saving and powerful heating.

Products with this mark have passed the type inspection of the Japan Gas Appliances Inspection Association. (LP gas, 13A)

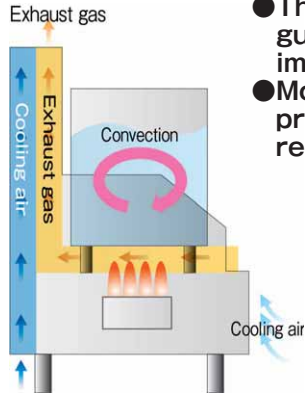

- The exhaust gas exhausted along the back guard heats the back of the pot, which improves the thermal efficiency.
- Moreover, side guard and front guard of grid prevent diffusion of exhaust gas, which reduce radiation heat to operator remarkably.

Options

φ390 pot heat collection attachment
List price (tax-excluded) ¥14,000
※MLO-067C, 067GC only

Feed water pipe
List price (tax-excluded) ¥22,000
※For all models



To obtain the expected thermal efficiency, please use the pot heat collection attachment.





MLO-067C and MLO-067GC require a stop water valve for the equipment.

Compact Depth 600mm type!

MLO-066B

List price ¥268,000 (tax-excluded)

A ring type grid fits closer to the bottom of pot is adopted. Exhaust gas goes directly to the exhaust stack without diffusing!

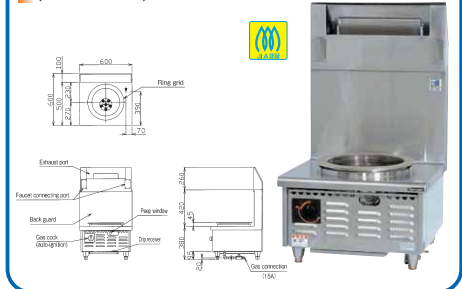

There are peep windows at both side of grid, therefore you can check the flame condition, and which facilitate flame control.

MLO-067C
List price ¥298,000 (tax-excluded)
PATENTED

Joint development
Tokyo Gas Co., Ltd.,
Osaka Gas Co., Ltd.,
Toho Gas Co., Ltd., and
Maruzen Co., Ltd.



MLO-067GC
List price ¥318,000 (tax-excluded)
PATENTED

Joint development
Tokyo Gas Co., Ltd.,
Osaka Gas Co., Ltd.,
Toho Gas Co., Ltd., and
Maruzen Co., Ltd.

Low Range < Cool Kitchen Series > Specifications Table

Model	External dimensions (mm)				Gas consumption		Gas connection (water inlet)	Weight (kg)
	Width	Depth	Height	Back height	Town gas (13A only)	LP gas		
MLO-066B (L) (R) (inner piping)	600	600	380	420	11.7kW (10,000kal/h)	—	15A (15A)	82
MLO-067C (L) (R) (inner piping)	650	750	420	685	14.5kW (12,500kal/h)	13.4kW (0.96kg/h)	15A (15A)	95
MLO-067GC(L)(R)(outer piping)	650	750	420	685	14.5kW (12,500kal/h)	13.4kW (0.96kg/h)	15A (15A)	98

■ The letter L at the end of the model name means the water supply pipe is mounted at the left side and R means at the right side. The price is increased by ¥22,000 (tax-excluded).

■ Please see the back cover for the diameter of usable stockpots.

■ Delivery date of MLO-066B and MLO-067GC(L)(R) is about 2 weeks after receipt of order.