

Gas Auto Gyoza Cooker

Model Change

Fully automatic grilling of gyoza! Menu registration function for easier use.

Anyone can easily cook delicious gyoza.

It runs complete automation of grill, water supply, steam, and finish grilling. Even non-regular workers can grill gyoza professionally on their first day.

5 menu program function is equipped! **NEW**

The pan temperature, grill time, amount of water supply, and grilling start temperature can be freely set, allowing delicious cooking of gyoza of different sizes and types. In addition, up to 5 menus can be registered for the cooking process. There is no need to change the settings each time you cook.



Grilling time is down-counted. **NEW**

Grilling time is indicated by down-counting. The time to complete the cooking is clearly visible.

Compact body for easy installation. **NEW**

The size of the main body has been downsized. The more compact size allows for a wider choice of installation space.

Clad steel plate* which is excellent for heat storage.

Clad steel plate is used for the pan. In addition to reducing the temperature irregularity and preventing uneven grilling, the cooking surface is stainless steel, which is resistant to rust and easy to clean. (*Double structure with stainless and iron)

Removable lid for easy cleaning.



Lid is easily removable and easy-to-clean. You can keep equipment clean.

Please use the convenient dedicated stand.


(Refer to P.6)



MAZ-4B

- 24pieces/time
- 205-220pieces/hour



Model Change



MAZ-6B

- 36pieces/time
- 310-330pieces/hour


Model Change



MAZ-10B

- 60pieces/time
- 510-550pieces/hour


Model Change



MAZ-44B

- 24+24pieces/time
- 410-440pieces/hour


Model Change



MAZ-46B

- 24+36pieces/time
- 510-550pieces/hour

Model Change



Gas Auto Gyoza Cooker Specifications Table

Model	External dimension (mm)				Pan dimension (mm)				Number of pans	Gas consumption		Gas connection (Union)	Feed-water inlet	Power (50/60Hz)	Power consumption (50/60Hz)	Power cord	Pilot safety device	Drain outlet	Weight (kg)
	Width	Depth	Height	Height back	Width	Depth	Width	Depth		Town gas	LP gas								
MAZ-4B	300	750	330	150	180	395	—	—	1	5.12kW (4,400kcal/h)	5.12kW (0.37kg/h)	15A	15A	1φ100V	16W	2.5m with plug (ground adapter)	Flame rod system	25A	48.0
MAZ-6B	400	750	330	150	270	395	—	1	7.67kW (6,600kcal/h)	7.67kW (0.55kg/h)	15A	15A	1φ100V	16W	25A			56.0	
MAZ-10B	600	750	330	150	450	395	—	1	12.8kW (11,000kcal/h)	12.8kW (0.92kg/h)	15A	15A	1φ100V	16W	25A			98.0	
MAZ-44B	600	750	330	150	180	395	180	395	2	10.2kW (8,800kcal/h)	10.2kW (0.73kg/h)	15A	15A	1φ100V	32W			25A	94.0
MAZ-46B	700	750	330	150	180	395	270	395	2	12.8kW (11,000kcal/h)	12.8kW (0.92kg/h)	15A	15A	1φ100V	32W	25A	104		

■Accessory/Decompression check valve

Electric Auto Gyoza Cooker

Complete automation of grill, water supply, steam, and finish grilling!

■ Anyone can easily cook delicious gyoza.

It runs complete automation of grill, water supply, steam, and finish grilling. Even non-regular workers can grill gyoza professionally on their first day.

■ Clad steel plate* which is excellent for heat storage.

Clad steel plate is used for the pan. In addition to reducing the temperature irregularity and preventing uneven grilling, the cooking surface is stainless steel, which is resistant to rust and easy to clean. (*Double structure with stainless and iron)

■ Free setting type to grill a variety of shaped gyoza deliciously.

You can set grill time, amount of feed water, surface grill time freely according to your original gyoza.



● Easy one touch panel

■ Automatic feeding water is stable due to flow rate sensor.

Automatic feeding of the specified amount of water regardless of tap water pressure or pipe diameter can streamline steam process.

■ Thermistor sensor is provided to maintain accurate temperature of pan.

Thermistor sensor to maintain accurate temperature of the whole pan always realizes beautifully and evenly browned gyoza.

■ Removable lid type is also available.

Removal lid type is also available (model S). Lid is easily removable and easy-to-clean. You can keep equipment clean.

Easy to clean!

● Removable lid type.



MAZE-4S


● Please use the convenient dedicated stand.

(Refer to P.6)





MAZE-4(S)

- 24pieces/time
- 205-220pieces/hour




MAZE-6(S)

- 36pieces/time
- 310-330pieces/hour




MAZE-44(S)

- 24+24pieces/time
- 410-440pieces/hour

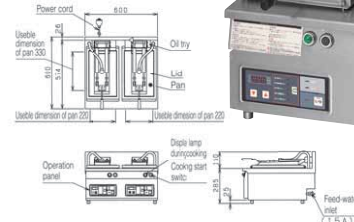


MAZE-46(S)

- 24+36pieces/time
- 510-550pieces/hour



MAZE-66(S)

- 36+36pieces/time
- 610-660pieces/hour



■ Electric Auto Gyoza Grill Machine Specifications Table

Model		External dimension (mm)				Pan dimension (mm)				Number of pans	Power (50/60Hz)	Power consumption (50/60Hz)	Necessary hand switch capacity	Power cord	Feed-water inlet	Weight (kg)	
Fixed lid	Removable lid	Width	Depth	Height	Height back	Width	Depth	Width	Depth							Fixed lid	Removable lid
MAZE-4	MAZE-4S	300	600	285	150	220	330	—	—	1	3φ200V	3kW	15A	2m ground 3P 15A with plug	15A	40.0	39.0
MAZE-6	MAZE-6S	410	600	285	150	330	330	—	—	1	3φ200V	4.5kW	15A	2m ground 3P 15A with plug	15A	44.0	43.0
MAZE-44	MAZE-44S	600	600	285	150	220	330	220	330	2	3φ200V	6kW	20A	2m ground 3P 20A with hook plug	15A	67.0	65.0
MAZE-46	MAZE-46S	710	600	285	150	220	330	330	330	2	3φ200V	7.5kW	30A	2m ground 3P 30A with hook plug	15A	71.0	69.0
MAZE-66	MAZE-66S	820	600	285	150	330	330	330	330	2	3φ200V	9kW	30A	2m ground 3P 30A with hook plug	15A	74.0	72.0

■ Accessory/Decompression check valve

Pressure Type Electric Auto Gyoza Grill Machine

Quick cooking by pressure.

Dedicated packing provided at the back side of the lid seals pan and realizes speedy cooking by heating gyoza sheet and ingredient quickly by pressure.




●Dedicated packing



MAZE-PR4


MAZE-PR4

- 24pieces/time
- 240pieces/hour



MAZE-PR6

- 36pieces/time
- 360pieces/hour

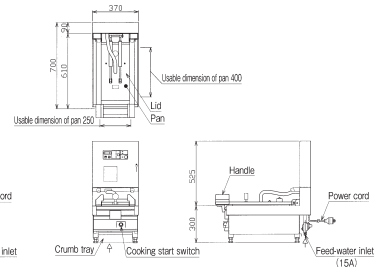

Pressure Type Electric Auto Gyoza Grill Machine Specifications Table

Model	External dimension (mm)				Pan dimension (mm)		Number of pans	Power (50/60Hz)	Power consumption (50/60Hz)	Necessary hand switch capacity	Power cord	Feed-water inlet	Weight (kg)
	Width	Depth	Height	Height back	Width	Depth							
MAZE-PR4	300	700	300	525	180	400	1	3 φ 200V	4.5kW	20A	2m ground 3P 20A with hook plug	15A	59.0
MAZE-PR6	370	700	300	525	250	400	1	3 φ 200V	5.5kW	30A	2m ground 3P 30A with hook plug	15A	70.0

■Accessory/Crumb tray box